

Light, fast and well
balanced!



CE

BeA Stapler

145/40-779C

- Very light, fast and well balanced.
- Fast shot sequence increases productivity
- Ergonomic handgrip, operator friendly, less fatigue
- Adjustable exhaust
- BeA-Quick release front nose
- Contact actuation
- Accepts all staples type 140 and 145 from 18-40 mm

Applications

Fastening of corrugated board layers and cardboard, butt joints in furniture and timber frame construction, fastening of roof boarding and shingles as well as floors



BeA 145/40-779C


Technical Data



Item code	12000639
EAN code	4045759058823
Magazin type	Top loader
Weight	2,2 kg (4,85 lbs)
Dimensions in mm	L = 436,5 H = 251 B = 88,5
Safety mechanism	Contact actuation
Fastener type	Typ 140 / 145
Magazine capacity, pieces	Type 140 = 157 / 145 = 145
Operating pressure	6 - 8 bar (90-120 psi)
Max operating pressure	8 bar (120 psi)
Air consumption / operation	1,4 litre / 6 bar (90 psi)
Inner hose diameter	Ø 9 - 10 mm LW recommended
Emission sound pressure level at workstation	$L_{pA, 1s, d} = 78$ dB
Single-shot emission sound pressure level	$L_{WA, 1s, d} = 85$ dB
Vibration level as per ISO 8662-11 is	2,7 m/s ² .
Accessories supplied with the tool	Operating instructions, spare parts list, service instructions, allen wrench

Subject to technical modifications

Staple Type 140 und 145

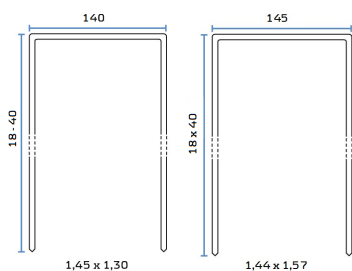

Length	L = 18 - 40 mm
Material	NK = galv. steel
	VZ = galvanized steel, extra hard
	RF = stainless steel, material 1.4301
	NR = stainless steel, material 1.4401
Coating	HZ = resin coated

Joh. Friedrich Behrens AG
 Industrielle
 Befestigungssysteme
 Bogenstraße 43 - 45
 22926 Ahrensburg
 Germany

Further Information:
 Tel.: +49 (0) 41 02 78 - 445
 Fax +49 (0) 41 02 78 - 270
 info@bea-group.com
 www.bea-group.com

BeA is a member of following associations:

