



For wire collated  
BDC nails




# BeA Pneumatic Nailer 102 DC

For nails: BDC 2.5 - 3.8 mm in the lengths of 55 - 100 mm

- Extremely powerful and sturdy
- Integrated sound absorption
- Ergonomic handgrip, operator friendly
- Dust and dirt protection
- Second handgrip
- Reinforced nose piece
- Adjustable coil nail support (metal)
- Thread for mounting
- Tool body protection

## Applications

Siding / cladding, sheathing, sub flooring,  
pallets, boxes and cases, house constructions

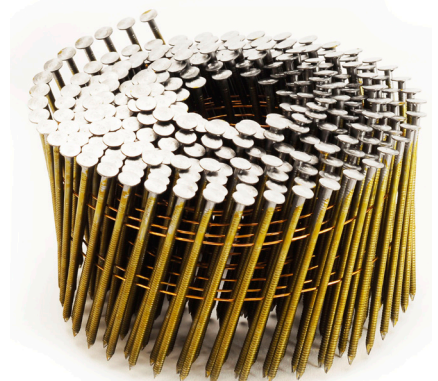


## BeA 102 DC

### Technical Data



Article code	12100492
EAN code	4045759050674
Magazine type	Top loader
Weight	5.25 kg
Dimensions in mm	L 338, H 418, B 153
Safety system	Contact actuation
Fastener type	Type BDC
Magazine capacity	max. 150 - 300 nails
Operating pressure	5 - 8 bar
Max operating pressure	8 bar
Air consumption/operation	5.38 litre / 6 bar
Inner hose diameter	9 - 10 mm recommended
Emission sound pressure level at the workstation	$L_{pA, 1s, d} = 95.7$ dB
Single shot emission sound pressure level	$L_{WA, 1s, d} = 96.9$ dB
Vibration level as per ISO 8662-11 is	5.35 $m/s^2$ .
Accessories	Operating instructions, spare parts list, service instructions, allen wrenches, oil, safety glasses

### Coil nails BDC



BDC : 55 - 100 mm

<b>BDC nails</b>	= wire welded coil nails
Width	2.5 - 3.8 mm
Length	55 - 100 mm
Material	BK = steel, bright
	NK = steel, electro galvanized
	RF = stainless steel, comparable to material 1.4301
	NR = stainless steel, comparable to material 1.4401
	FV = steel, hot dipped galvanized
Surface properties	Smooth
	Ring shank
	Screw shank
Nail heads	Flat head
	Dome head
	Torx

Joh. Friedrich Behrens AG  
Industrielle Befestigungssysteme  
Bogenstraße 43 - 45  
22926 Ahrensburg  
Germany

Further Information:  
Phone: +49 (0) 41 02 78 - 283  
Fax +49 (0) 41 02 78 - 275  
Email: [info@bea-group.com](mailto:info@bea-group.com)  
[www.Bea-Group.com](http://www.Bea-Group.com)

BeA is a member of the following trade associations:

