



For wire collated
BDC nails




BeA Pneumatic Nailer 102 DC

For nails: BDC 2.5 - 3.8 mm in the lengths of 55 - 100 mm

- Extremely powerful and sturdy
- Integrated sound absorption
- Ergonomic handgrip, operator friendly
- Dust and dirt protection
- Second handgrip
- Reinforced nose piece
- Adjustable coil nail support (metal)
- Thread for mounting
- Tool body protection

Applications

Siding / cladding, sheathing, sub flooring,
pallets, boxes and cases, house constructions

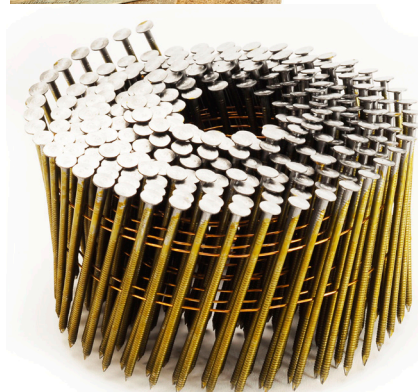

BeA 102 DC

Technical Data



Article code	12100492
EAN code	4045759050674
Magazine type	Top loader
Weight	5.25 kg
Dimensions in mm	L 338, H 418, B 153
Safety system	Contact actuation
Fastener type	Type BDC
Magazine capacity	max. 150 - 300 nails
Operating pressure	5 - 8 bar
Max operating pressure	8 bar
Air consumption/operation	5.38 litre / 6 bar
Inner hose diameter	9 - 10 mm recommended
Emission sound pressure level at the workstation	$L_{pA, 1s, d} = 95.7 \text{ dB}$
Single shot emission sound pressure level	$L_{WA, 1s, d} = 96.9 \text{ dB}$
Vibration level as per ISO 8662-11 is	5.35 m/s^2 .
Accessories	Operating instructions, spare parts list, service instructions, allen wrenches, oil, safety glasses

Coil nails BDC


BDC nails = wire welded coil nails

Width	2.5 - 3.8 mm
Length	55 - 100 mm

Material	BK = steel, bright
	NK = steel, electro galvanized
	RF = stainless steel, comparable to material 1.4301
	NR = stainless steel, comparable to material 1.4401
	FV = steel, hot dipped galvanized

Surface properties	Smooth
	Ring shank
	Screw shank

Nail heads	Flat head
	Dome head
	Torx



BDC : 55 - 100 mm

Joh. Friedrich Behrens AG
Industrielle Befestigungssysteme
Bogenstraße 43 - 45
22926 Ahrensburg
Germany

Further Information:
Phone: +49 (0) 41 02 78 - 283
Fax +49 (0) 41 02 78 - 275
Email: info@bea-group.com
www.Bea-Group.com

BeA is a member of the following trade associations:

