


Pneumatic Stapler Type 14/32-613

A lightweight compact shaped and particularly well-balanced tool with an integrated silencer. Easy to service. The 14/32-613 stapler drives staples type 14, type 16 and type 155 in length from 15 – 32mm. The easily fitted attachments make the tool a valuable asset for application such as fastening spring clips in furniture assembly.

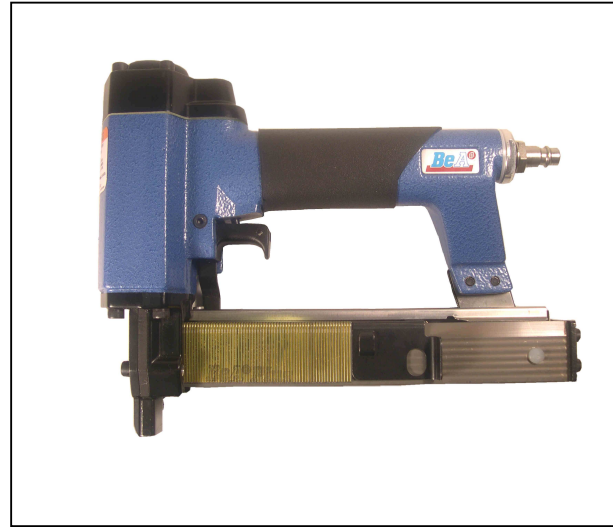

Popular applications:

Furniture industry (spring clip / RapidClip), caravans, general carpentry, pallet and boxes, panelling

Length:	228 mm
Width:	56,5 mm
Height:	198 mm

Technical data

Type description:	14/32-613 Contact	14/32-613 Single
Article code:	12000215	12000217
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 14 / Type 16 (155)	Type 14 / Type 16 (155)
Magazine capacity:	110 / 102	110 / 102
Fasteners per strip:	1 x 75 / 1 x 70	1 x 75 / 1 x 70
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	0,9 litre / 6 bar	0,9 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB	L WA, 1 s,d= 87 dB
Weight:	1,4 kg	1,4 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Article code	Description
14400859	Roller Edge Guide, resilient
14400902	Guide Plate with high-adjustable stop
14400881	Spring clip attachment
14400886	Rapid clip stop
14401076	Single actuation set
14403421	Remote valve
14403527	Mounting flange

BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive for Machinery (89/392 EWG)


Pneumatic Stapler Type 14/32-613

Staples type 14 and type 16 (155)



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

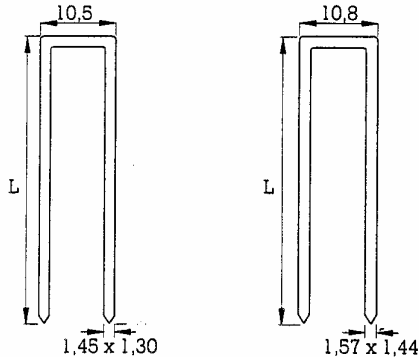

Bezeichnung	L = length mm
14/15 NK HZ	15
14/18 NK HZ	18
14/21 NK HZ	21
14/25 NK HZ	25
14/30 NK HZ	30
14/32 NK HZ	32

155/15 NK HZ	15
155/18 NK HZ	18
16/25 NK HZ (155/25)	25
16/28 NK HZ (155/28)	28
16/30 NK HZ (155/30)	30
16/32 NK HZ (155/32)	32

14/25 NR HZ DP	25
----------------	----

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut