



CE


BeA Pneumatic Nailer 556 DC

For Roofing Nails

- Lightweight and powerful
- Magnesium housing
- Depth control adjustment
- Contact actuation
- 360° adjustable exhaust
- Ergonomic handgrip, operator friendly
- Adjustable coil nail support
- Sturdy base plate
- Supplied in rugged case

Applications

Fastening of roofing felt, bitumen shingles, insulation material, fibreboards and cardboards, wooden crates and packaging.

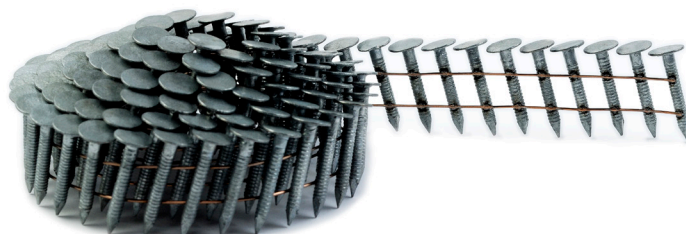


BeA 556 DC

Technical Data



Description	556 DC
Article code	12100609
EAN code	4045759056492
Magazine type	Top loader
Safety system	Contact actuation
Fastener type	Roofing nails
Magazine capacity	1 Coil
Nails per coil	1 x 120
Operating pressure	5 - 8 bar
Max operating pressure	8 bar
Air consumption/operation	1.1 litre / 6 bar
Inner hose diameter	Ø 9 - 10 mm recommended
Dimensions in mm	287 / 116 / 273
Weight	2.25 kg
Emission sound pressure level at the workstation	99.9 dB
Single shot emission sound pressure level	102.9 dB
Vibration level as per ISO 8662-11 is 2.53 m/s ² .	
Accessories	Operating instructions, spare parts list, service instructions, allen wrench, oil, safety glasses, sound absorption

Roofing Nail DPN

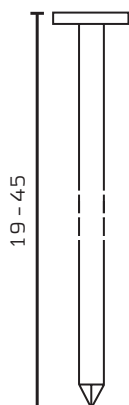

Length	19 - 45 mm
Width	Ø 3.1
Material	BK = steel, bright NK = steel, electro galvanized RF = stainless steel, comparable to material 1.4301 NR = stainless steel, comparable to material 1.4301 FV = steel, hot dipped galvanized
Surface properties	Smooth Ring shank Screw shank

Joh. Friedrich Behrens AG
Industrielle Befestigungssysteme
Bogenstraße 43 - 45
22926 Ahrensburg Germany

Further Information:
Phone: + 49(0) 41 02 78 - 444
Fax + 49 (0) 41 02 78 - 270
Email: info@bea-group.com
www.bea-group.com

BeA is a member of the following trade associations:

