

For corrugated nails type W



CE


BeA nailer W 15-788C

For corrugated nails type W 15 in the lengths 9 - 15 mm

- Extremely powerful and robust
- Contact actuation
- Very light, fast and well balanced.
- Fast shot sequence increases productivity
- Ergonomic handgrip, operator friendly, less fatigue
- Adjustable exhaust
- BeA Quick release

Applications

Timber frame construction, wood construction, fastening of butt and corner joints in furnitures, windows and doors, booth construction, etc

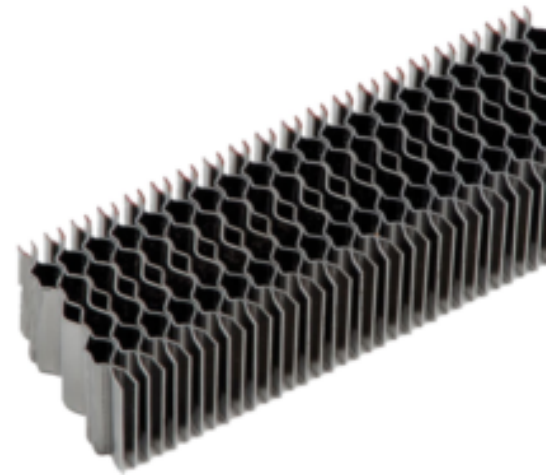

BeA W15-788C


Technical data



Art. no.	12000660
EAN code	4045758124574
Magazin type	Top loader
Weight	3.0 kg
Dimensions in mm	L = 356 H = 251
Safety system	Contact actuation
Fastener type	Corrugated nails type W
Magazin capacity	approx. 77 nails
Operating pressure	8 bar
Max. operating pressure	8 bar
Air consumption / operation	1.5 litre / 6 bar
Inner hose diameter	Ø 9 - 10 mm LW recommended
Noise characteristics (according to EN12549:1999)	L _{pA, 1s, d} = 90 dB K _{pA} : 2,5 dBA
	L _{WA, 1s, d} = 96 dB K _{pA} : 2,5 dBA
Vibration level as per ISO 8662-11 is 4.5 m/s ² .	K _a : 0.94 m/s ²
Supplied with the tool	General operating instructions, tool specific information, allen wrench

Subject to technical changes

Corrugated nails type W



Description	Length mm
W 09 BK A	9
W 12 BK A	12
W 15 BK A	15

BeA GmbH
Industrielle
Befestigungssysteme
Bogenstrasss 43 - 45
22926 Ahrensburg -
Germany

Weitere Informationen:
Tel: + 49(0) 41 02 78 - 444
info@bea-group.com
www.bea-group.com

BeA is a member of following applications:

